
















Maxi WT


jaga

Montagehandleiding / Instructions de montage
Montageanleitung / Mounting instructions









Energy
SAVERS
LOW-H₂O

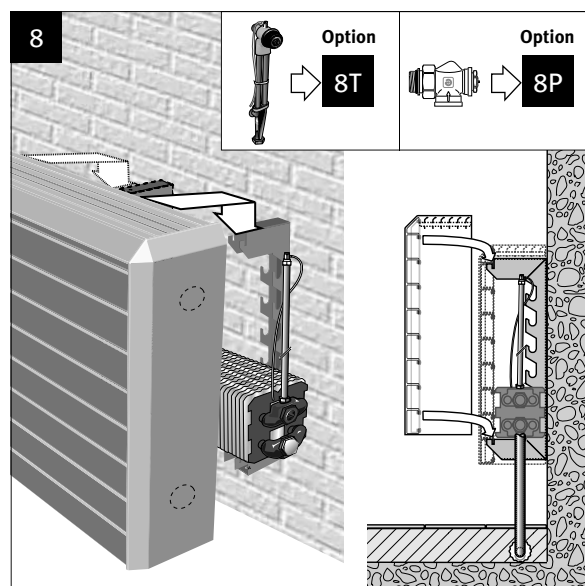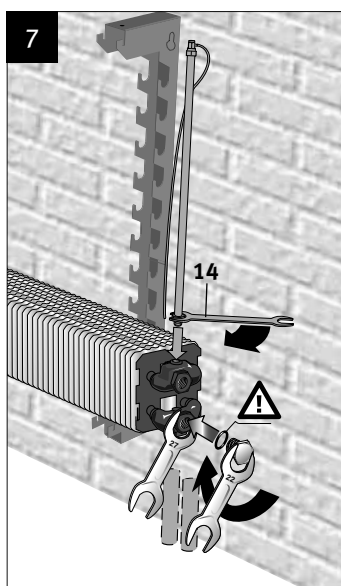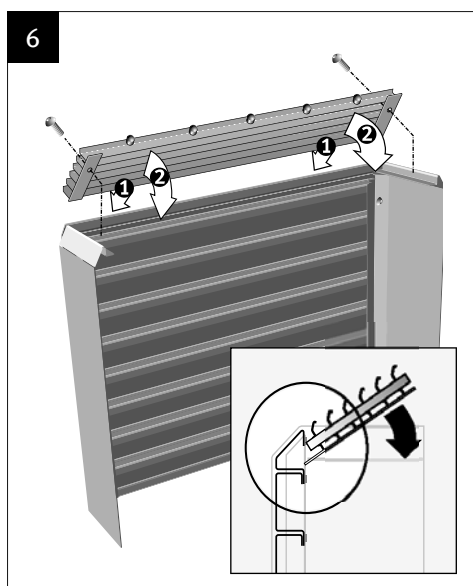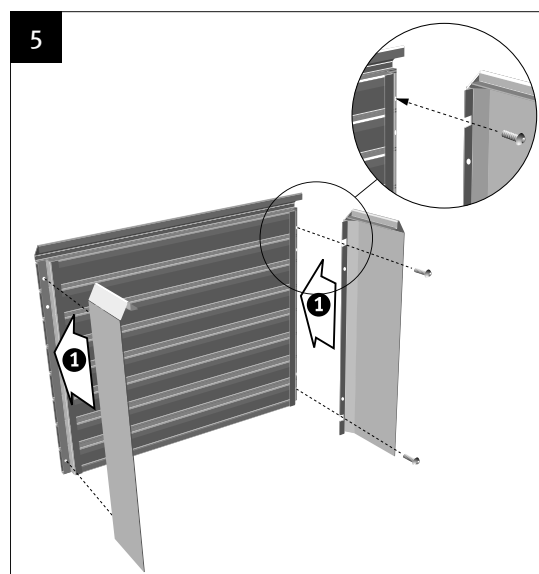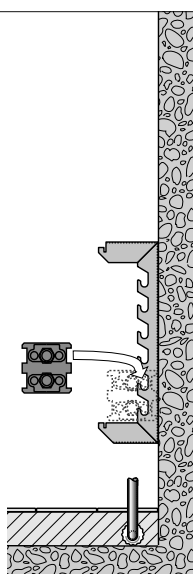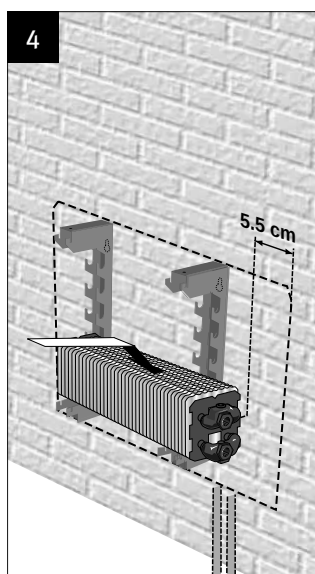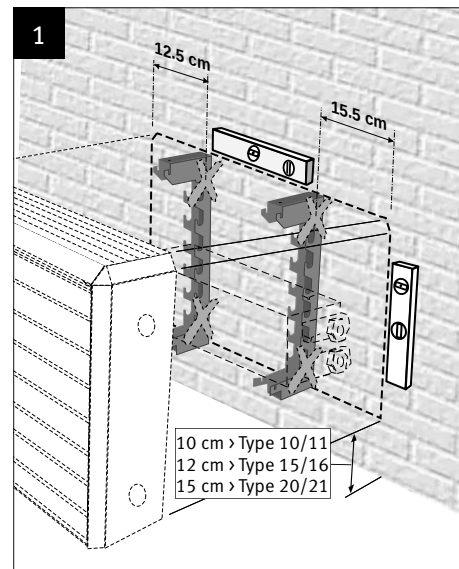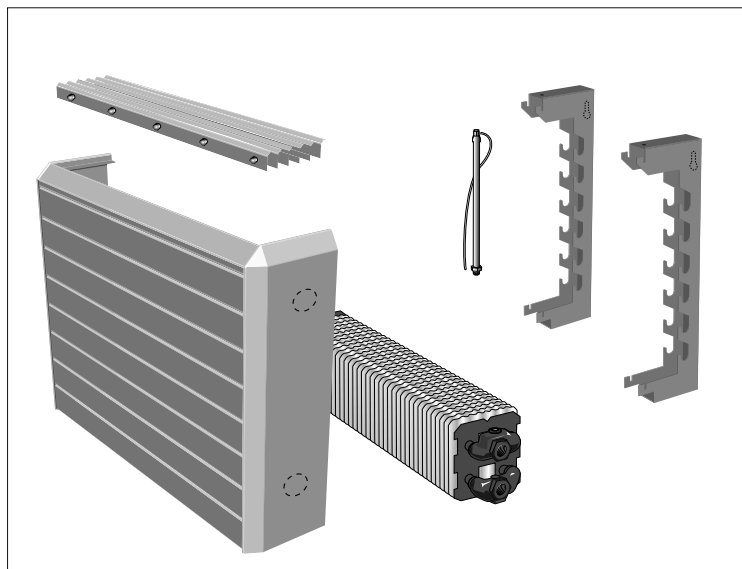

Montage met topventiel
Montage avec top vanne
Montage mit Topventil
Mounting with top valve



H	Code
44	5090.1300300
59	5090.1300600
74	5090.1300900

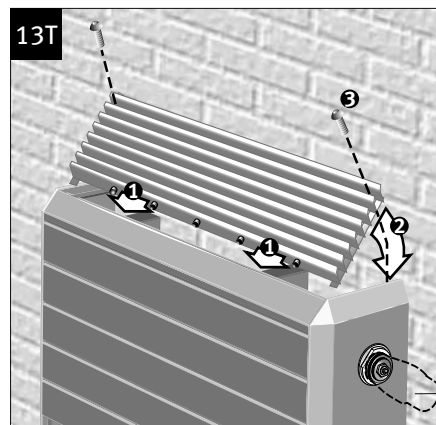
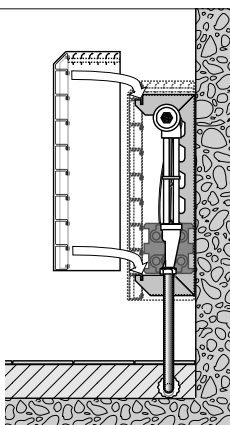
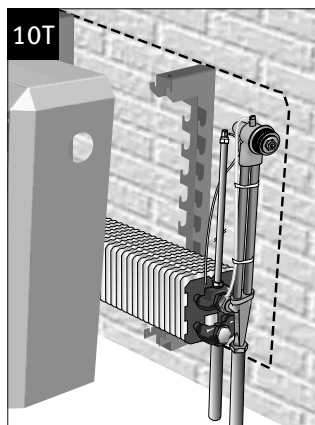
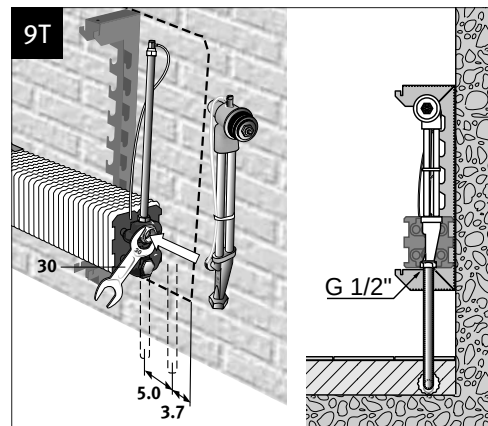
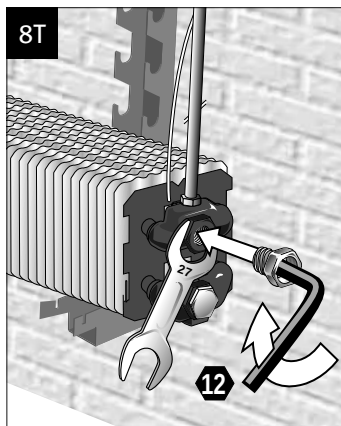



***OPTION**



Montage met Jaga ventiel
Montage avec vanne Jaga
Montage mit Jaga Ventil
Mounting with Jaga valve

Code
5090.405 standard Kv
5090.404 small Kv

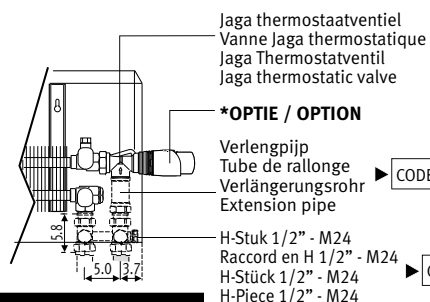

***OPTIE / OPTION**




CODE 5090.108

CODE 5090.120



Type	d	h/min*
10-11	5.3	10
15-16	7.8	12
20-21	10.3	15

- * Kleinere afstanden kunnen een lichte daling van de afgifte tot gevolg hebben.
- * Des dimensions inférieures peuvent diminuer légèrement l'émission de chaleur.
- * Kleinere Abstände verändern geringfügig die Wärmeleistung.
- * Smaller dimensions can decrease output.

Montage slotjes (Niet mogelijk bij optie onderrooster.)
Montage serrures (Pas possible avec option grille de base.)
Montage Verschlüsse (Nicht möglich bei Option Bodenschutzrost.)
Mounting locks (Not possible with option base grille.)



Montage penseelrooster
Montage option grille inférieure
Montage Option Oberschutzrost
Mounting pencil-proof grille



Montage onderrooster (Niet mogelijk bij optie slotjes.)
Montage grille de base (Impossible avec option serrures.)
Montage Bodenschutzrost (Nicht möglich bei Option Verschlüsse.)
Mounting base grille (Not possible with option locks.)

